

ALPHACOM XE20 AUDIO SERVER

WITH HD VOICE



when communication is **critical**

FEATURES

- Made to provide critical communication in any environment
- Supports 552 IP stations and 102 analog intercom stations
- Global networking and integration
- IP, SIP and analog station support
- Extended Software Options
- SIM card based software configuration and disaster recovery
- Fully compatible with any AlphaCom system
- Extended memory supports future expansion and new services
- High quality professional PA broadcasting and messaging services
- Security voice guidance for public safety and building security
- Auto-attendant functionality (Automatic voice supported switchboard)
- Voice supported call guidance



DESCRIPTION

With AlphaCom XE, flexibility is key. You can have just a few or thousands of users spread around different locations. Thanks to its open, modular design and scalable architecture, AlphaCom XE has the flexibility to grow with your business and adapt to your long term needs. The system can be tailored to support applications of almost unlimited specificity and complexity.

STENTOFON's CCoIP® (Critical Communication over IP) implies the employment of Voice over IP applications required in critical situations. AlphaCom XE is designed with CCoIP incorporation which ensures the delivery of instant and secure voice and data services. The AlphaCom XE system provides carrier class system availability and protects resources in an IP environment by using embedded IP security mechanisms. The main security mechanisms used are restricted management access, separate management interface, internal firewall, integrity check (MD5), virtual LAN (IEEE 802.1Q) and network access control (IEEE 802.1X).

SPECIFICATIONS


Dimensions (WxHxD)	482 x 265 x 365 mm / 18.97 x 10.43 x 14.37 inch.
Weight	37.47 lbs.
Power	90-270 V AC 550 W max.
Mounting	19" rack
Processor subsystem	Intel IXP425 with HW acceleration for packet processing and encryption
Media subsystem	DSP @ 1600 MIPS, FPGA @ 400K gates
Storage subsystem	Solid state (64 MB Flash), SIM card (IP configuration, HW-ID)
Memory	128 MB SDRAM, 1 MB NVRAM
Subscriber Capacity	552 intercom stations per server

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
1009621000	AlphaCom XE20 for 19" mounting - A100K10800	19 kg/41.88 lbs.
1009291120	Related items: AlphaPro Professional USB dongle	

ALPHACOM XE20 AUDIO SERVER WITH HDVOICE

Analog Stations	6 per line card
Analog Telephones	12 telephones per line card
Busy Hour Call	60 000 BHCA
IP Telephones	552 IP telephones per server
Integrity check	MD5 (RFC 1321)
IP priority	DiffServ/PTOS
IP security	SSH, HTTPS, firewall
SIP	RFC 3261, SIP INFO, RE-Invite, RFC 2833, RFC 4733
VoIP Internal Networking	30 channels
VoIP External Networking	30 channels
ISDN Trunk	ISDN PRI (30 channels)
Analog Trunk	FXO (4 & 8 channels)
GSM Trunk	Quad band GSM
Other	Custom ASCII (EDO), STENTOFON Data, Scripting engine
Configuration	AlphaPro over IP, Web
Monitoring and logging	SNMP trap, SNMP MIB, syslog, Web, e-mail, SQLite
SW Upgrade	Web, Automatic upgrade, Station
Internal Audio Format	1-bit (18.5 kHz)
Analog Stations	18.5 kHz audio
General Audio Interface	18.5 kHz audio
VoIP Audio	HDVoice - G.722 (7 KHz), Telephone Audio - G.711 (3.4 KHz)
Open Duplex Conference	20 conference channels, max 20 participants
Push to Talk Conference	50 conference channels, unlimited number of participants Priority features
Group Call	250 groups, unlimited number of participants Priority features
Call Modes	Open mode, ringing mode, Call request mode Priority features
Audio messaging	PA broadcasting, Auto-attended voice guidance (doors, elevators), Security voice response
Compliance	CE, EN 60950, FCC Part 15

INSTALLATION

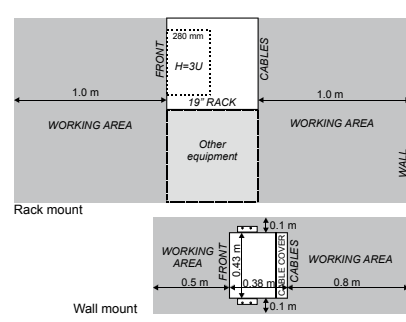

CONNECTIONS

Up to 4 units may be mounted in one 19" rack if sufficient ventilation is provided. It is recommended to mount a VZC cooling fan module on top of each exchange unit.

The two-pair star wired intercom cables are connected to connection boards on the cabinet D rail or in a separate distribution field.

Each subscriber line card provides 6 freely programmable Remote Control Outputs (RCO).

Two RJ-45 Ethernet terminals on the filter board are used for IP LAN and WAN communication.

The serial ports with RS232 and RS422/RS485 interfaces are used for connecting to equipment using these protocols. Eth0 is also used for programming the PC.

6 program distribution sources can be connected to the APC board via an optional program connection board. Up to 64 extra programs may be added using AGA boards with 16 programs per board.

The optional program connection board has input for 6 Remote Control Outputs (RCI) which can initiate programmed actions.

The exchange is powered from the mains.