

ALPHACOM XE26 AUDIO SERVER

WITH HD VOICE



when communication is **critical**

FEATURES

- Made to provide critical communication in any environment
- Supports 552 IP stations and 138 analog intercom stations
- Global networking and integration
- IP, SIP and analog station support
- Extended Software Options
- SIM card based software configuration and disaster recovery
- Fully compatible with any AlphaCom system
- Extended memory supports future expansion and new services
- High quality professional PA broadcasting and messaging services
- Security voice guidance for public safety and building security
- Auto-attendant functionality (Automatic voice supported switchboard)
- Voice supported call guidance

DESCRIPTION

With AlphaCom XE, flexibility is key. You can have just a few or thousands of users spread around different locations. Thanks to its open, modular design and scalable architecture, AlphaCom XE has the flexibility to grow with your business and adapt to your long term needs. The system can be tailored to support applications of almost unlimited specificity and complexity.

STENTOFON's CCoIP® (Critical Communication over IP) implies the employment of Voice over IP applications required in critical situations. AlphaCom XE is designed with CCoIP incorporation which ensures the delivery of instant and secure voice and data services. The AlphaCom XE system provides carrier class system availability and protects resources in an IP environment by using embedded IP security mechanisms. The main security mechanisms used are restricted management access, separate management interface, internal firewall, integrity check (MD5), virtual LAN (IEEE 802.1Q) and network access control (IEEE 802.1X).



SPECIFICATIONS

Dimensions (WxHxD)	
Rack mount	483 x 841 x 365 mm / 19.01 x 33.11 x 14.37 inch.
Floor cabinet	483 x 841 x 513 mm / 19.01 x 33.11 x 20.19 inch.
w. distribution field	483 x 841 x 593 mm / 19.01 x 33.11 x 23.34 inch.
Weight	
Rack mount	39.0 kg / 85.98 lbs.
Floor cabinet	46.0 kg / 101.41 lbs.
w. distribution field	53.5 kg / 117.94 lbs.
Power	90-270 V AC 660 W max.
Mounting	Floor or 19" rack
Processor subsystem	Intel IXP425 with HW acceleration for packet processing and encryption


Ring Communications Ltd
01353 865568
www.ringuk.com

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
1009627000	AlphaCom XE26 Audio Server with HDVoice	42 kg/92.59 lbs.
1009627100	AlphaCom XE26 Floor cabinet version 11	48 kg/105.82 lbs.
1009627200	AlphaCom XE26 Floor cabinet with distribution field version 11	56 kg/123.45 lbs.
1009291120	Related items: AlphaPro Professional USB dongle	

ALPHACOM XE26 AUDIO SERVER WITH HDVOICE

Media subsystem	DSP @ 1600 MIPS, FPGA @ 400K gates
Storage subsystem	Solid state (64MB Flash), SIM card (IP configuration, Wi-Fi)
Memory	128 MB SDRAM, 1 MB NVRAM
Subscriber Capacity	552 intercom stations per server
Analog Stations	6 per line card
Analog Telephones	12 telephones per line card
Busy Hour Call	60 000 BHCA
IP Telephones	552 IP telephones per server
Integrity check	MD5 (RFC 1321)
IP priority	DiffServ, IPTOS
IP security	SSH, HTTPS, firewall
SIP	RFC 3261, SIP INFO, RE-Invite, RFC 2833, RFC 4733
VoIP Internal Networking	30 channels
VoIP External Networking	30 channels
ISDN Trunk	ISDN PRI (30 channels)
Analog Trunk	FXO (4 & 8 channels)
GSM Trunk	Quad band GSM
Other	Custom ASCII (EDQ), STENTOFON Data, Scripting engine
Configuration	AlphaPro over IP, Web
Monitoring and logging	SNMP trap, SNMP MIB, syslog, Web, e-mail, Site
SW Upgrade	Web, Automatic upgrade, Beta station
Internal Audio Format	1-bit (18.5 KHz)
Analog Stations	18.5 KHz audio
General Audio Interface	18.5 KHz audio
VoIP Audio	HDVoice - G.722 (7 KHz), Telephone Audio - G.711 (3.4 KHz)
Open Duplex Conference	20 conference channels, max 20 participants
Push to Talk Conference	50 conference channels Unlimited number of participants Priority features
Group Call	250 groups Unlimited number of participants Priority features
Call Modes	Open mode Ringing mode Call request mode Priority features
Audio messaging	PA broadcasting Auto-attendant, Voice guidance (doors, elevators) Security voice response
Compliance	CE, EN 60950, FCC Part 15

INSTALLATION

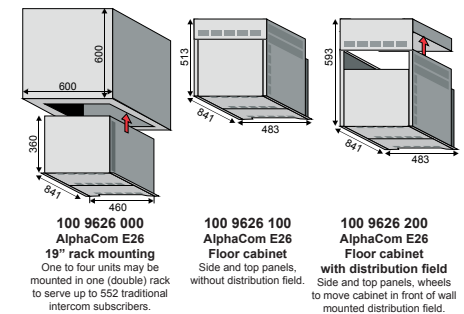

CONNECTIONS

The two-pair star wired intercom cables are connected to connection boards or a separate distribution field.

There is one Remote Control Output (RCO) per subscriber point on the connection board which can be programmed to perform actions via an optional relay board.

Two RJ-45 Ethernet terminals on the filter board are used for IP LAN and WAN communication.

The serial ports with RS232 and RS422/RS485 interfaces are used for connecting to equipment using these protocols. Eth0 is also used for programming the RCO.

6 program distribution sources can be connected to the RCO board via an optional program connection board. Up to 32 extra programs may be added using AGA boards with 16 programs per board.

The optional program connection board has input for 6 Remote Control Outputs (RCO) which can initiate programmed actions.

The exchange is powered from the mains.

ORDER NUMBER 1009627000
DOC NO A100K10801 04.03..2010

Sales@ringuk.com

