IP FLUSH MASTER

DISPLAY

STENTOFON

whencommunicationiscritical

FEATURES

- **Made for Critical Communication over IP - CCoIP® for use in any environment requiring fast and efficient communications**
- **Large high contrast display with white backlight for excellent readability**
- **Superb audio technology - gives loud-speaking hands-free duplex communication from any location in the room**
- **Optional handset unit**
- **Integrated Web server for easy configuration and monitoring**
- **Remote automatic software update**
- **Clean relay output contact for control of external equipment**

DESCRIPTION

The IP Flush Master with display is a general purpose intercom station intended for use where a desktop station is impractical. It features a large high contrast display with backlight which allows important information about connections to be shown very clearly, four direct access keys (DAK) provide single-touch access to stations, group calls, audio monitoring, public address zones, radio channels, and opening of doors and gates. The station connects directly to the IP network making it easy to deploy anywhere at any distance. Designed for CCoIP®, the station offers a set of critical communication features such as integrated firewall, group call, call priority and over-ride, to name just a few. This enables the delivery of instant, efficient and secure voice and data services in an IP environment.

SPECIFICATIONS

Dimensions (WxHxD)	125 x 280 x 33 mm
Weight	0.63 kg
Temperature Range	5° C to +45° C
Humidity Range	10% - 85% RH, non condensing
User interface	Backlit graphical display, 35 mm x 68 mm, 4 function keys, 4 programmable direct access keys (DAK), Green/Red status LED per DAK, Full keypad, Call indication LED
Power	Power over Ethernet, IEEE 802.3 a-f, Class 0, Local power 19-27 VDC, Idle 4 W, max. 13 W ext.amplifier)
Connectors	RJ45 (Ethernet) - RJ11 (Handset & Headset) Pluggable screw terminals (I/O local power)
IP protocols	IP v4 - TCP - UDP - HTTP – TFTP - RTP - RTCP -DHCP - DiffServ - TOS - STENTOFON CCoIP®
Audio technology	Wideband 200 Hz - 7 kHz (G.722), Telephony 3.4kHz (G.711), Acoustic echo cancellation, Open duplex - Adaptive jitter filter, Volume override

sales@ringuk.com

01353 865568

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
1008031000	IP FlushMaster, display	0.63 kg
1008097100	Handset for IP FlushMasters	
1008098700	Flush Mount Back Box	
1008097500	Gooseneck Microphone Kit	
1009648001	License: Use as CRM	
1008098800	Backbox for handset	

IP FLUSH MASTER DISPLAY

Audio output	1.5 Watt - 75 dB @ 1 m from speaker
Installation	Remote automatic software upgrade, Centralized provisioning, DHCP and static IP
Operation	Integrated web server, Network supervision - VoIP statistics, Centralized monitoring, Tone test and line monitoring
Advanced features	Adaptive end node firewall, Call queuing, priority and time of arrival, 256 call priorities, Dual port Ethernet switch

ACCESSORIES

GOOSENECK MICROPHONE

HANDSET

DIMENSIONS

BACKBOX FOR HANDSET

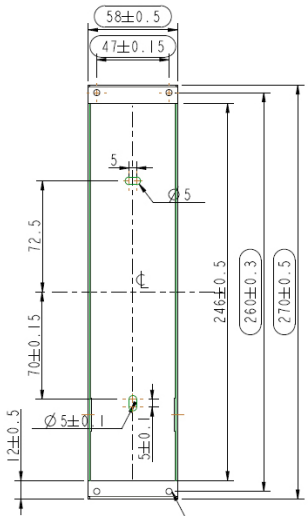

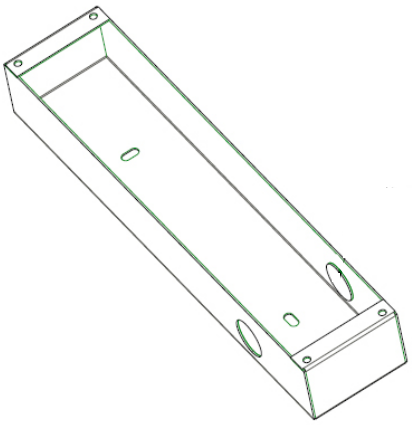

BACKBOX FOR IP FLUSH MOUNT STATION

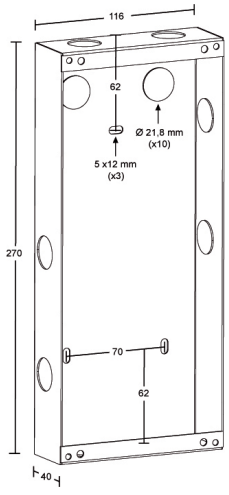

STENTOFON products are developed and marketed by Zenitel Norway AS. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001:2002. ZENITEL NORWAY AS reserves the right to modify designs and alter specifications without prior notice, in pursuance of a policy of continuous improvement. © 2009 Zenitel